

FIG. 1

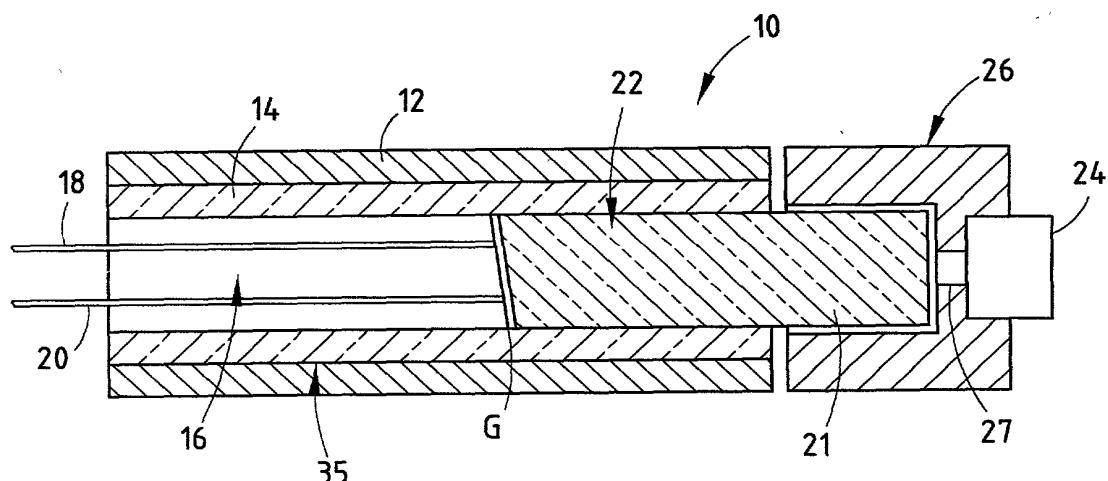


FIG. 2

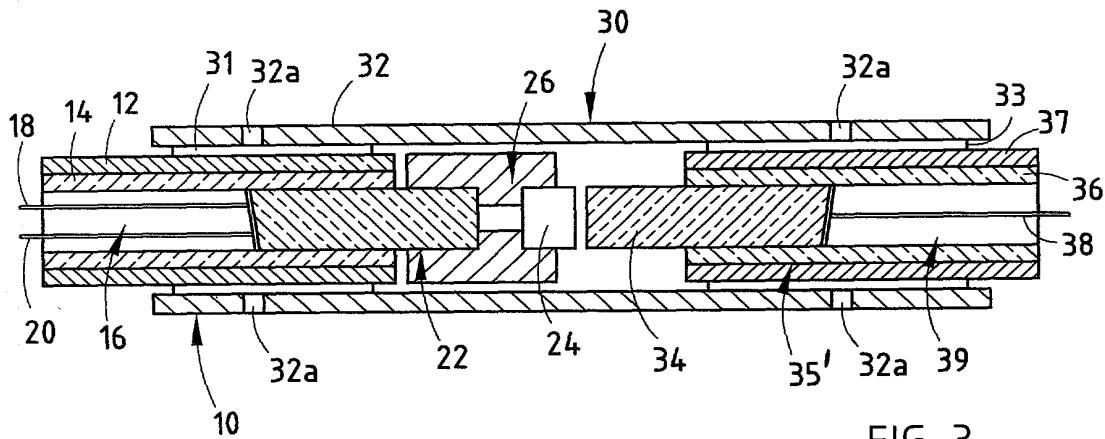


FIG. 3

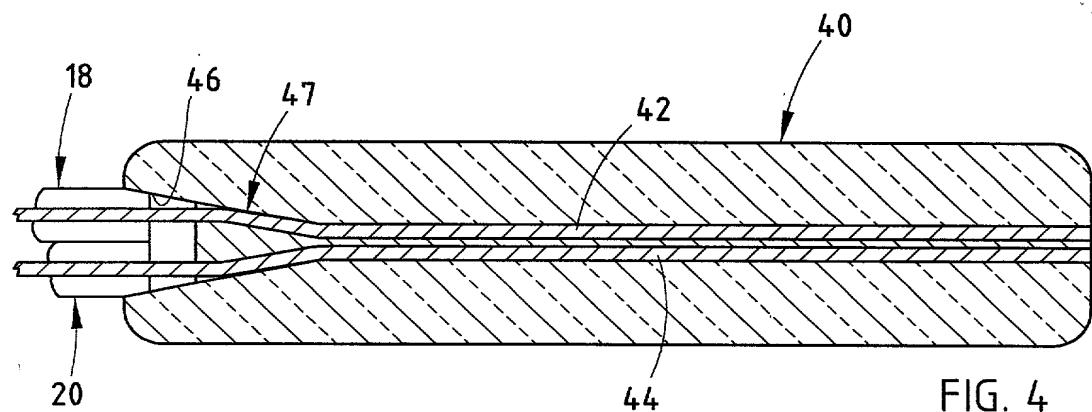


FIG. 4
(PRIOR ART)

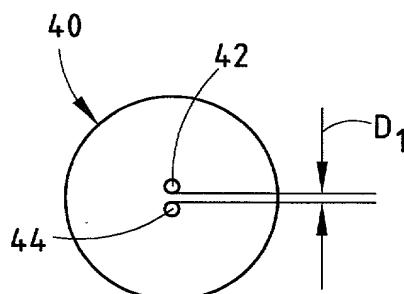


FIG. 4A
(PRIOR ART)

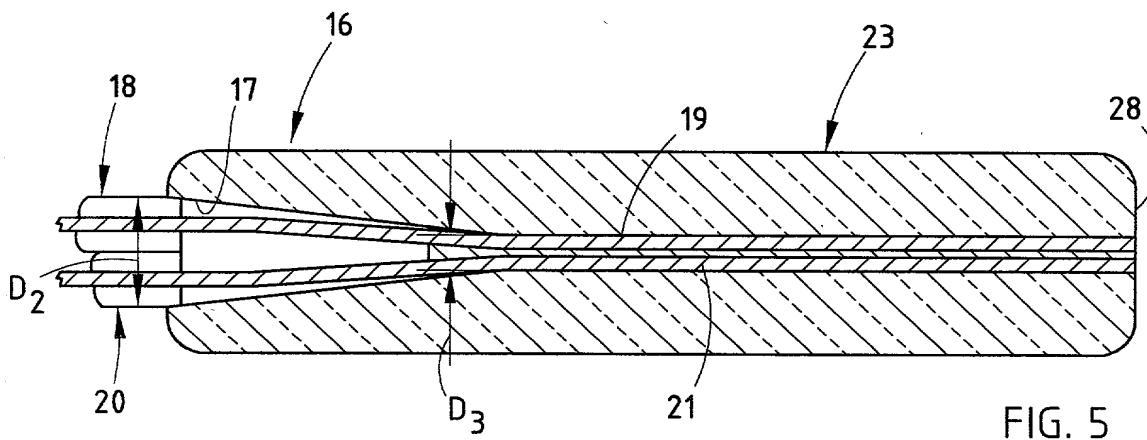


FIG. 5



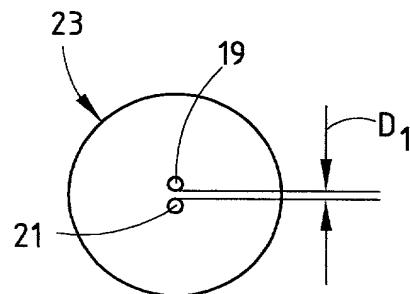


FIG. 5A

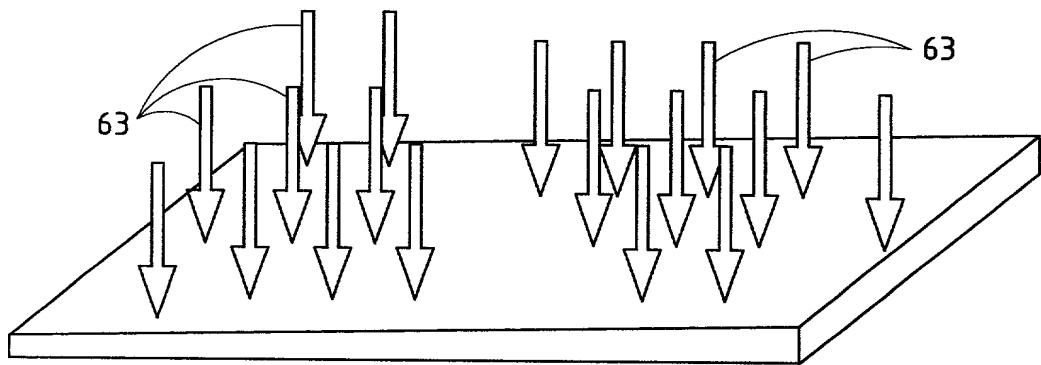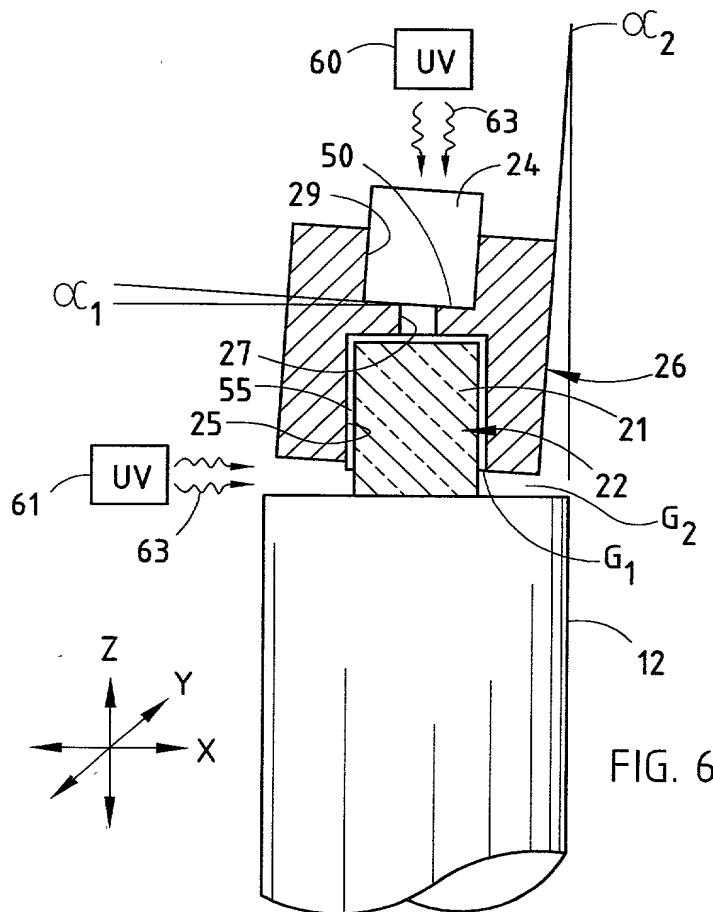

Applicant : Marc G. Brun et al.
For : Methods of Making a
Multiple-Port Optical
Package
Atty. Docket No. COR20 P-402/Sheet 4 of 18
Application No. 09/945,334

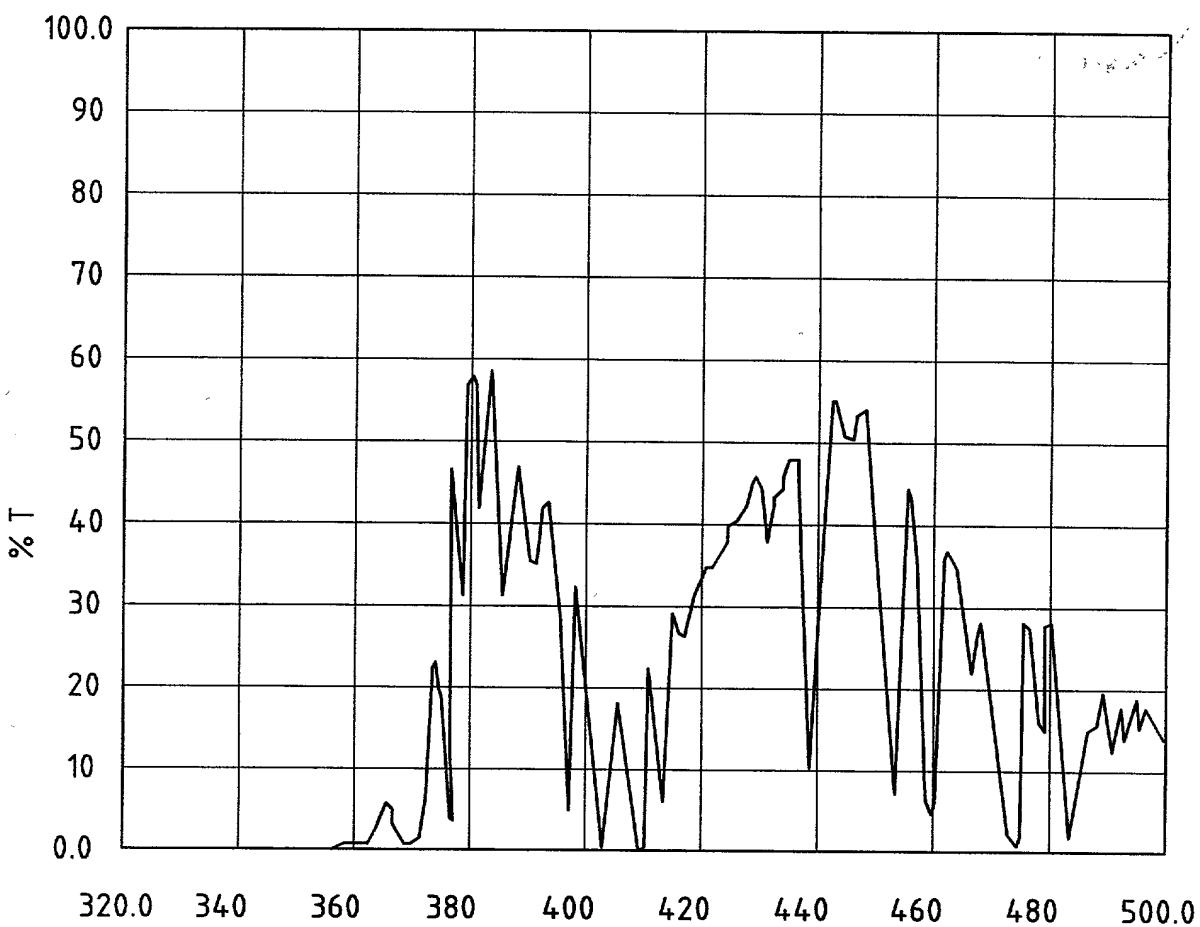


FIG. 8

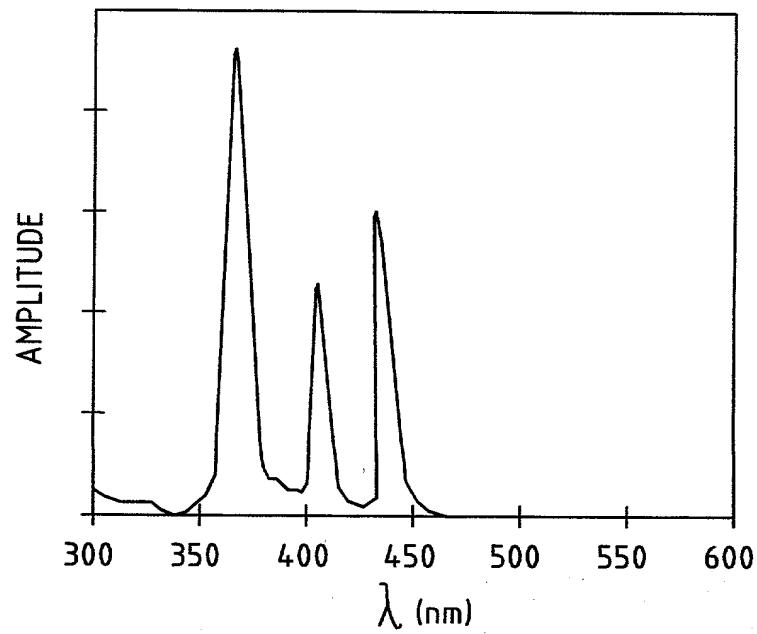


FIG. 9

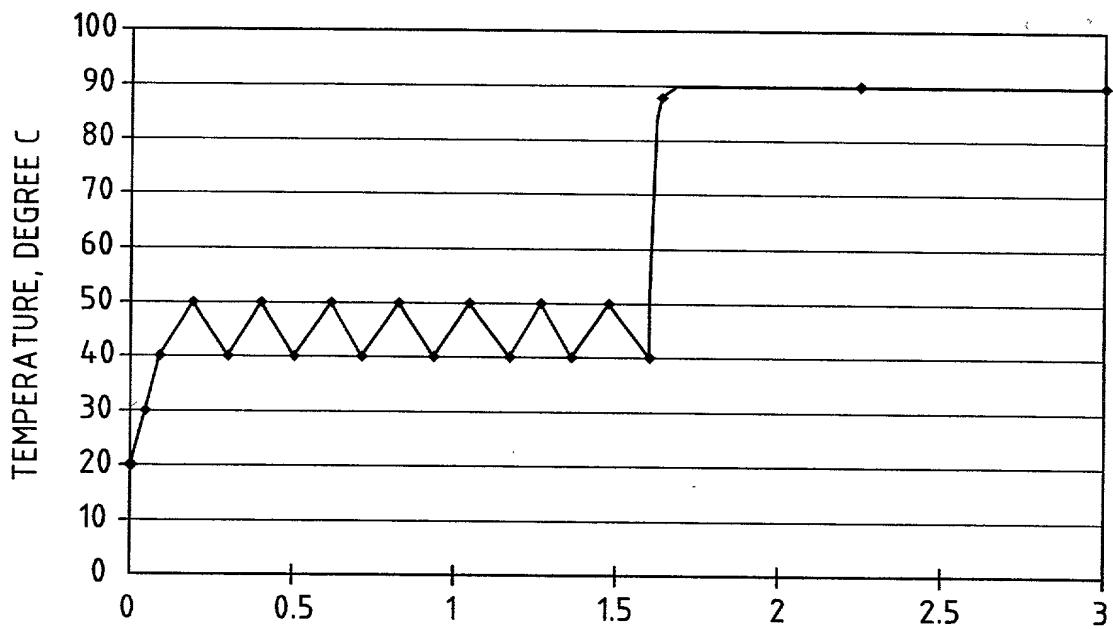


FIG. 10

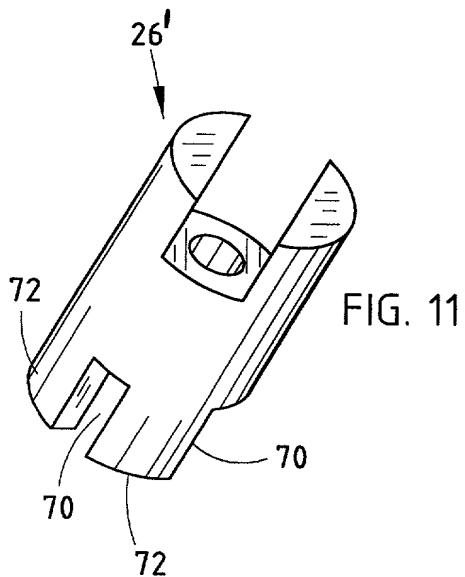


FIG. 11

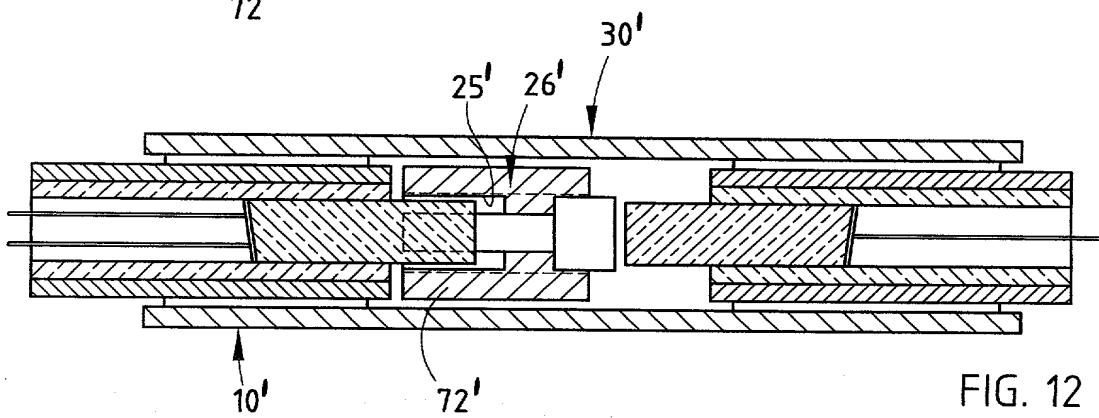


FIG. 12

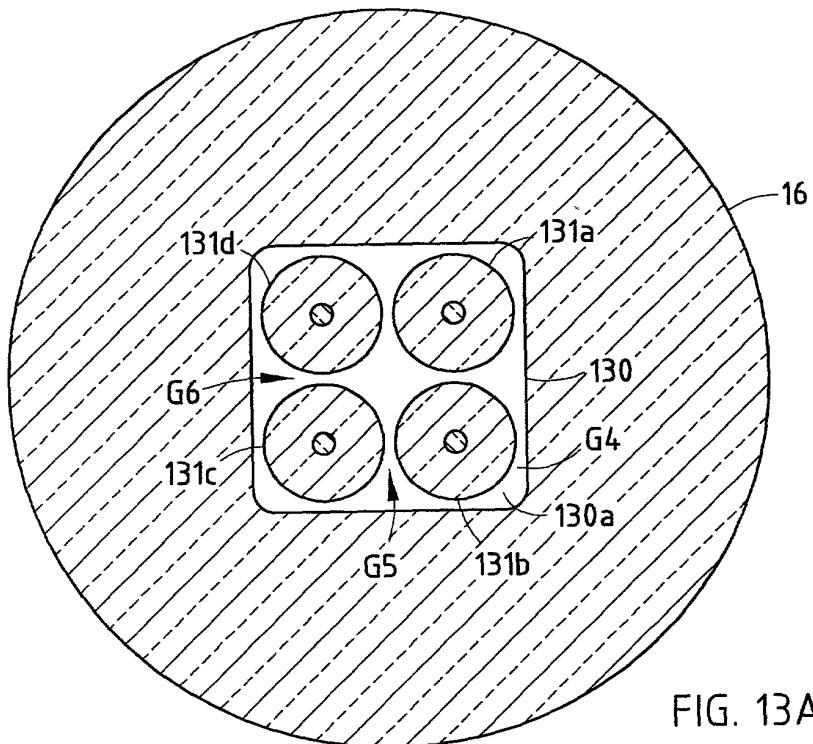


FIG. 13A





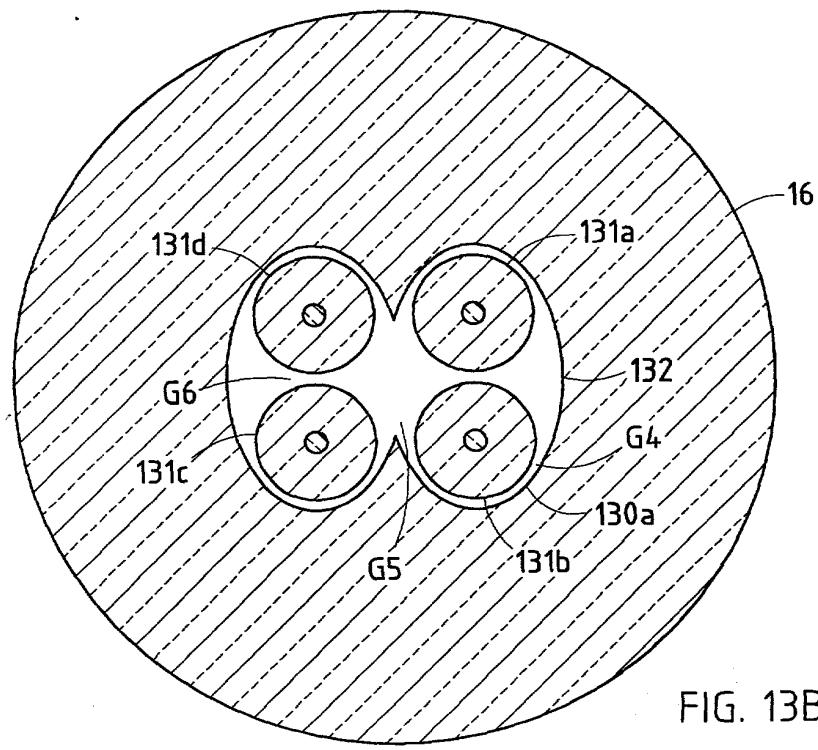


FIG. 13B

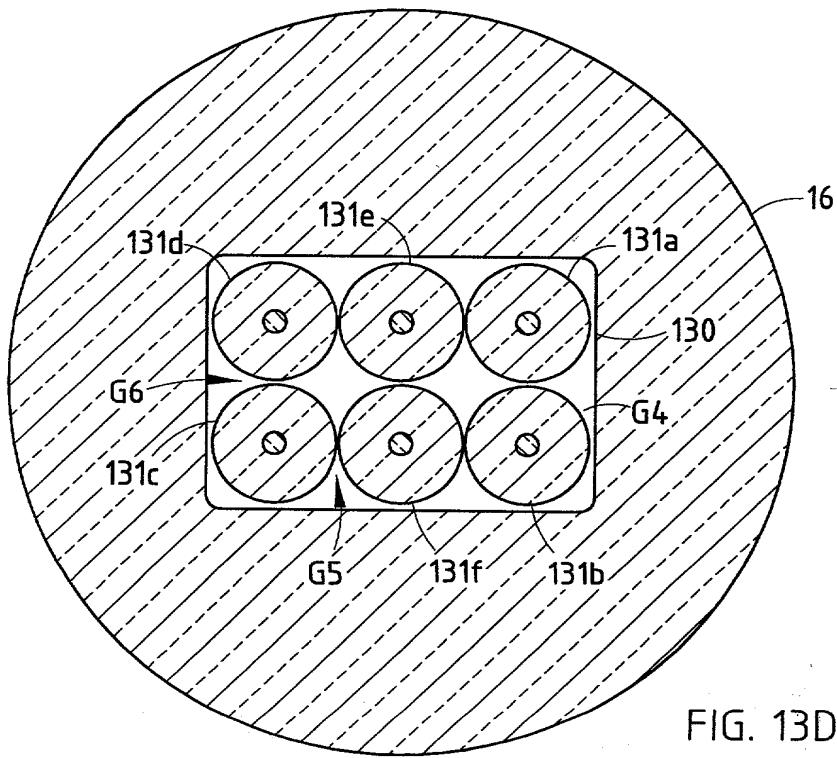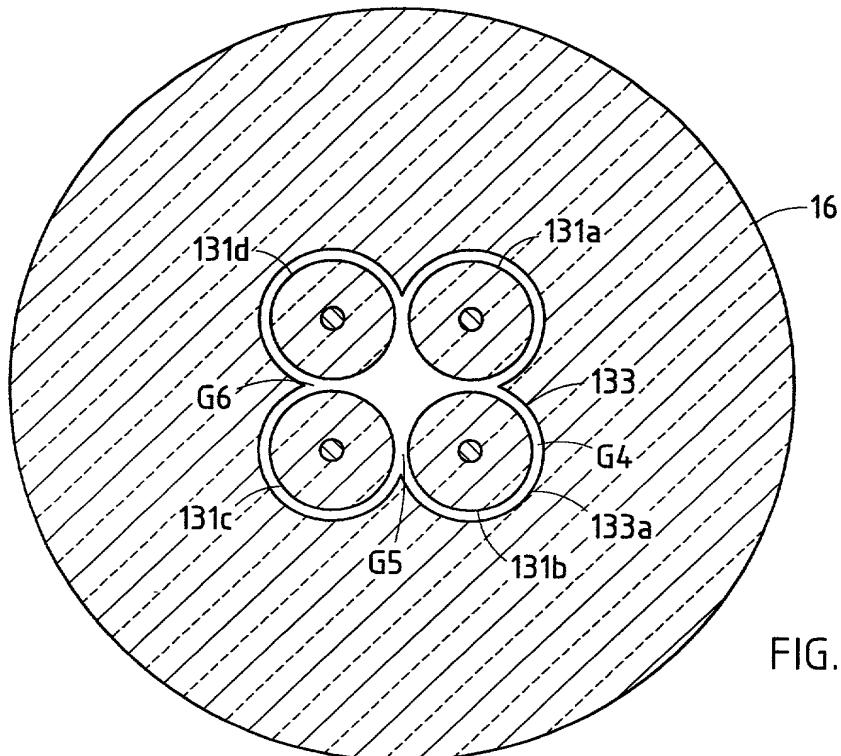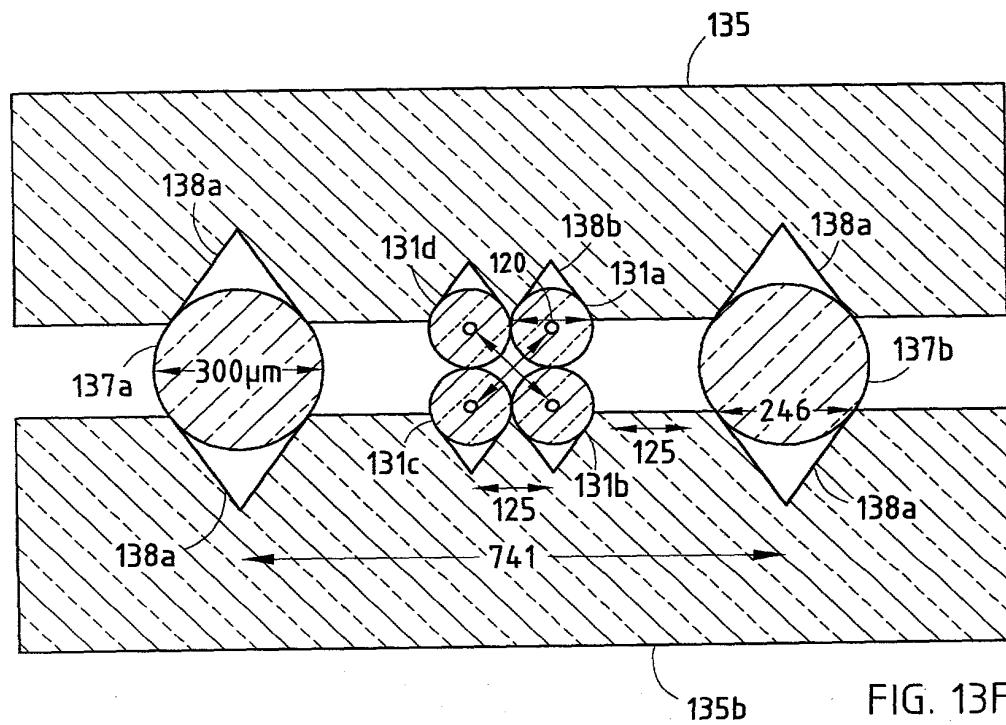

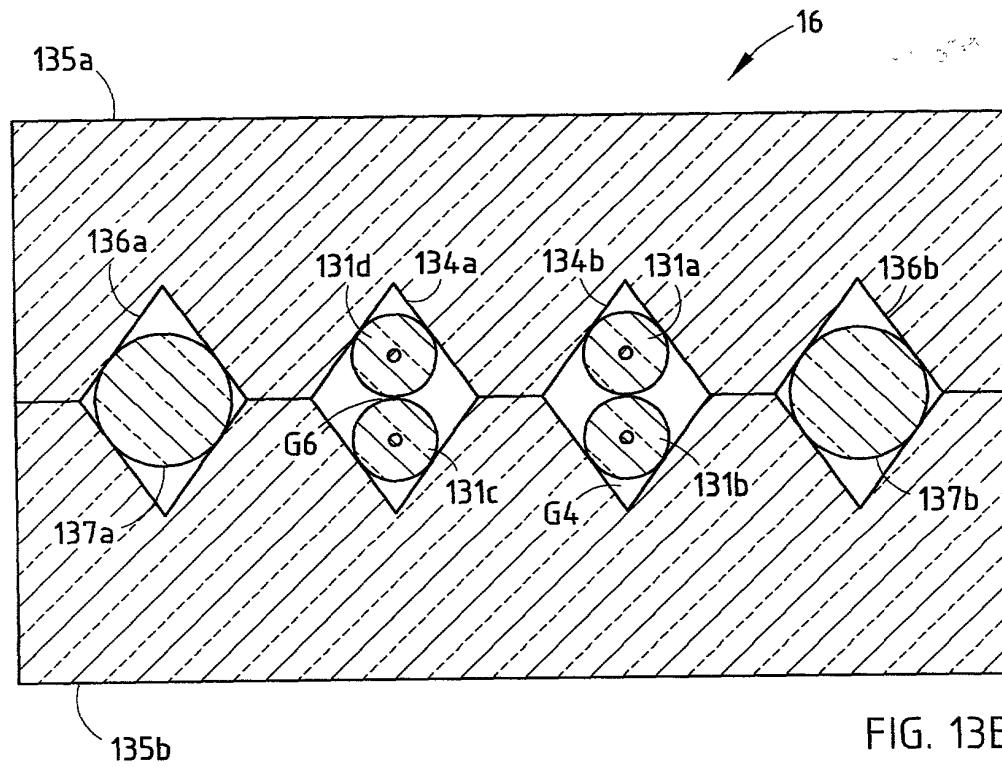

Applicant : Marc G. Brun et al.
For : Methods of Making a Multiple-
Port Optical Package
Atty. Docket No. COR20 P-402/Sheet 9 of 18
Application No. 09/945,334

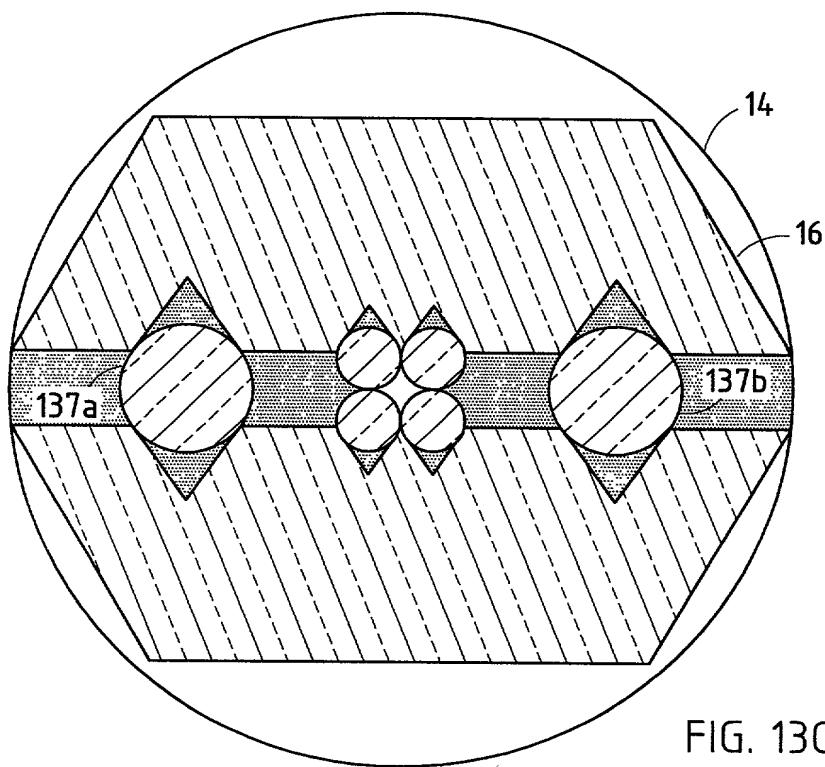


FIG. 13G

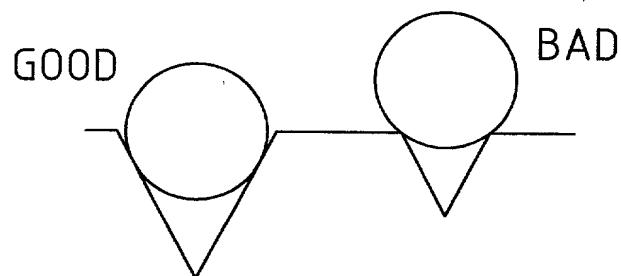


FIG. 13H

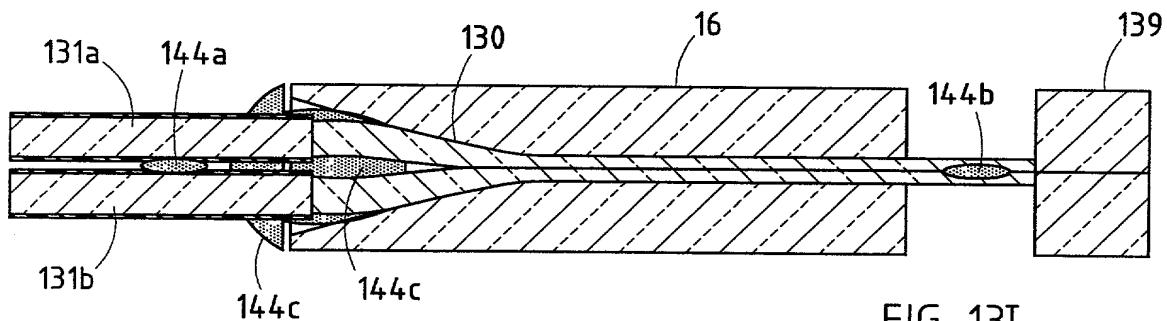


FIG. 13I

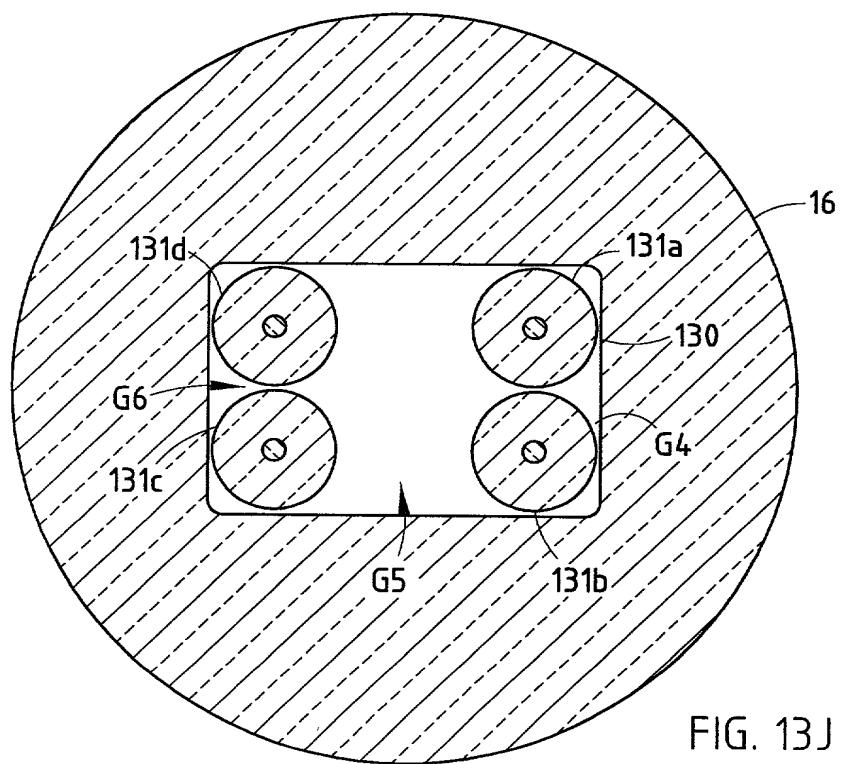


FIG. 13J

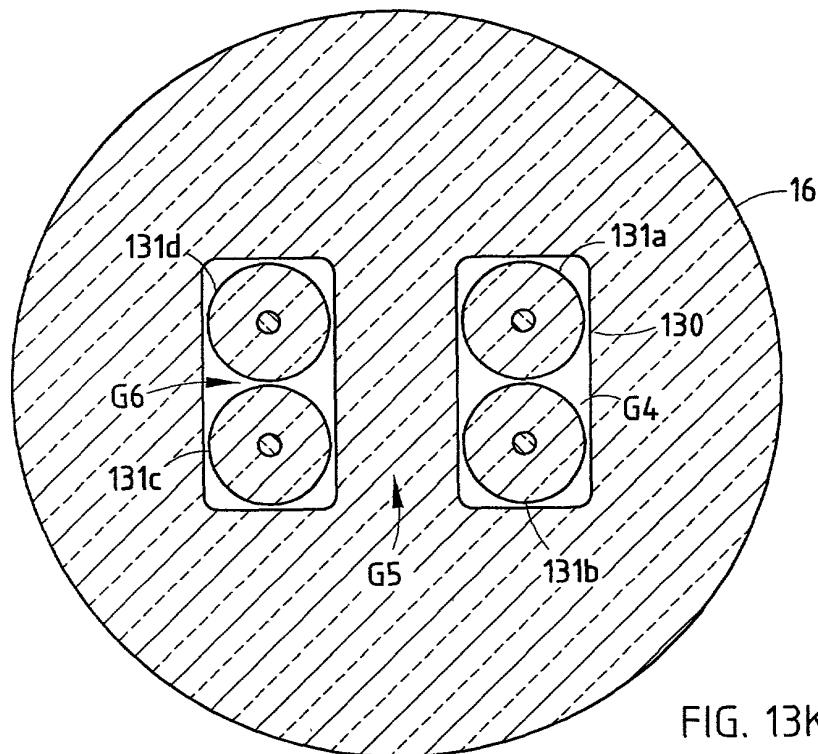


FIG. 13K

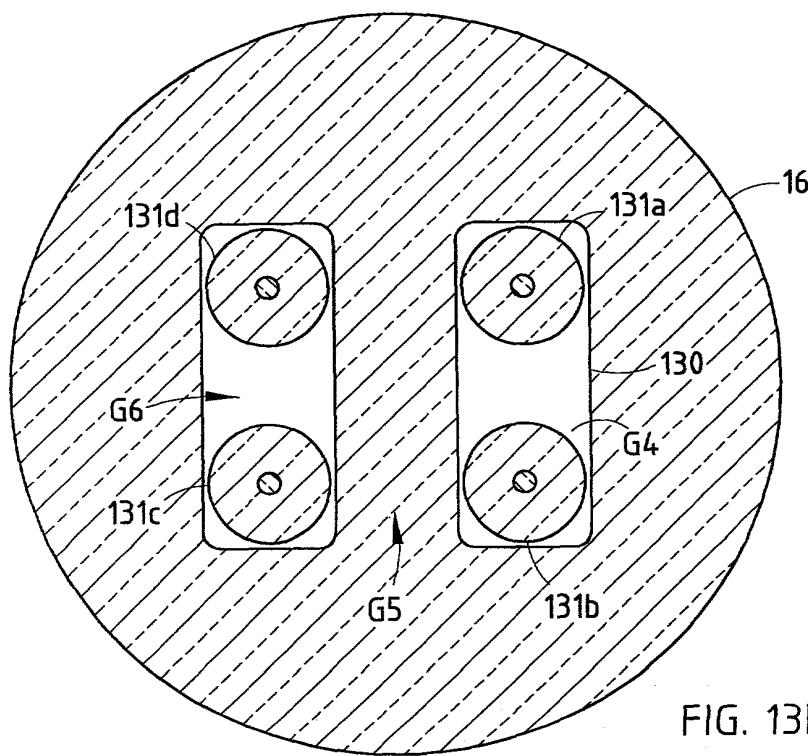


FIG. 13L

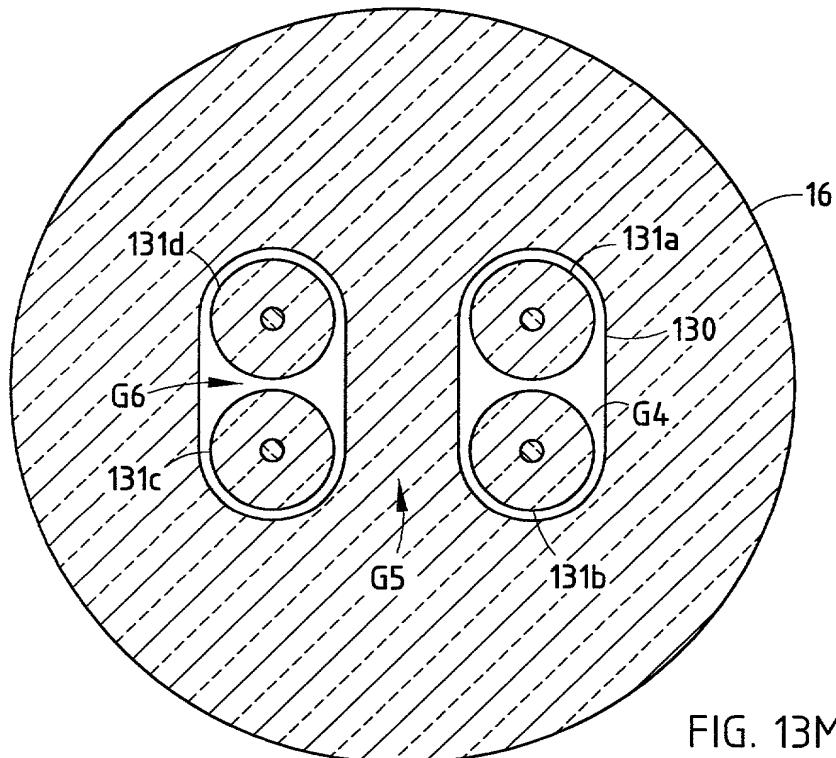


FIG. 13M

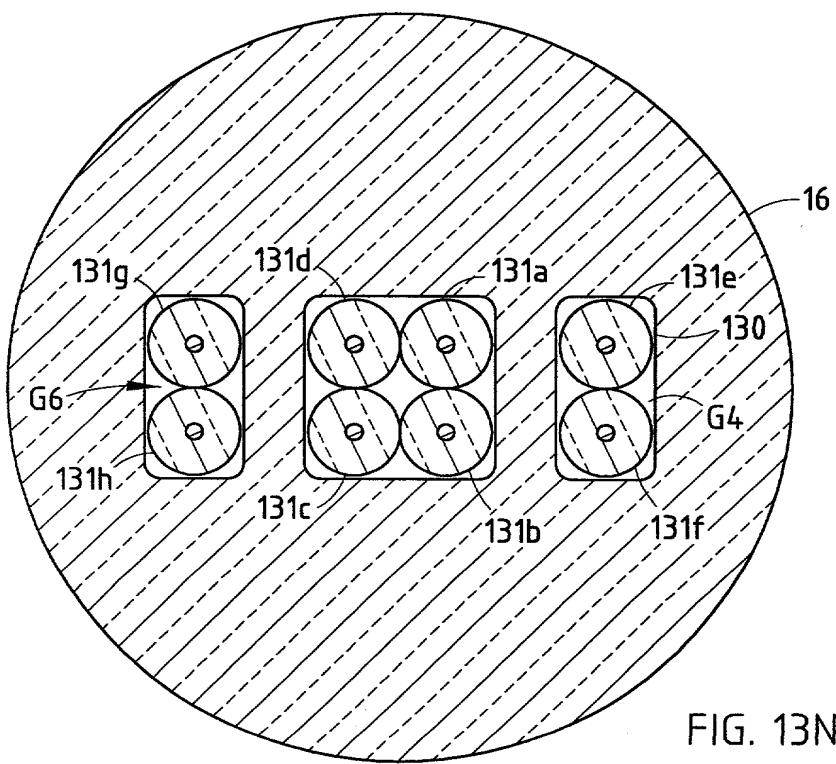


FIG. 13N

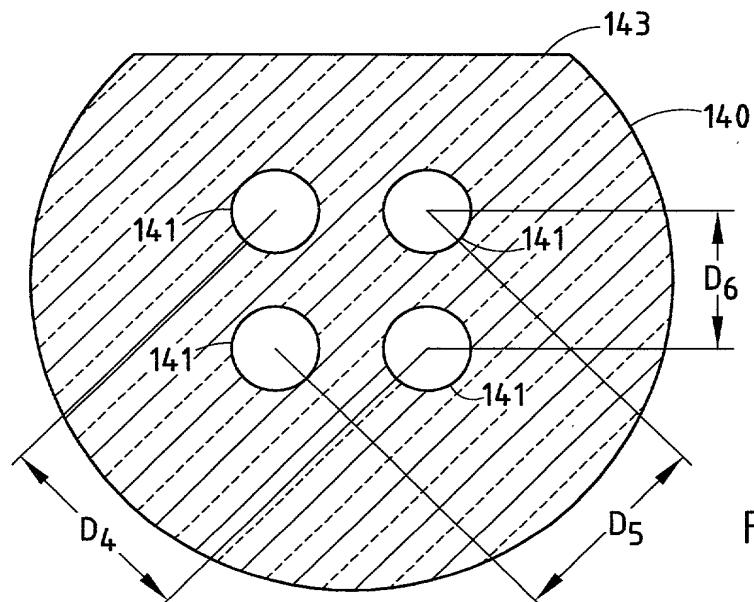


FIG. 14A

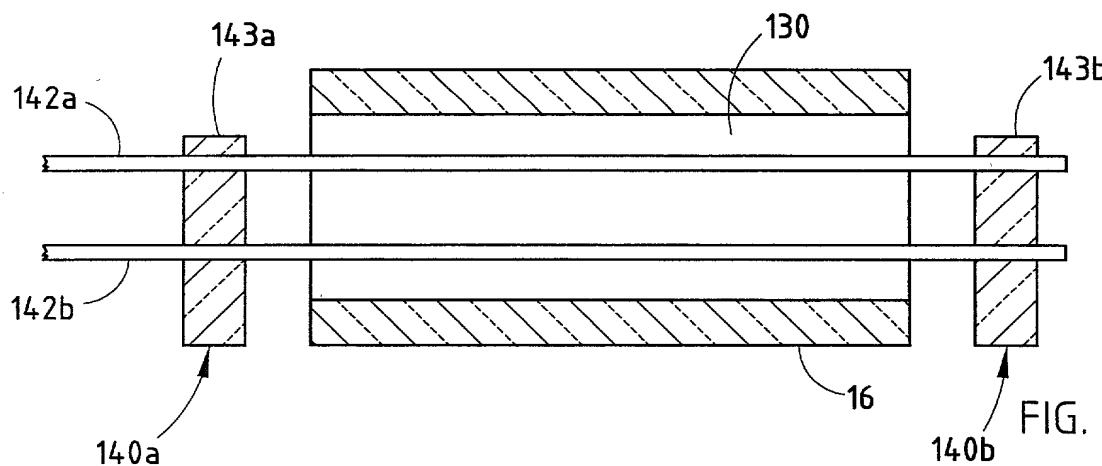
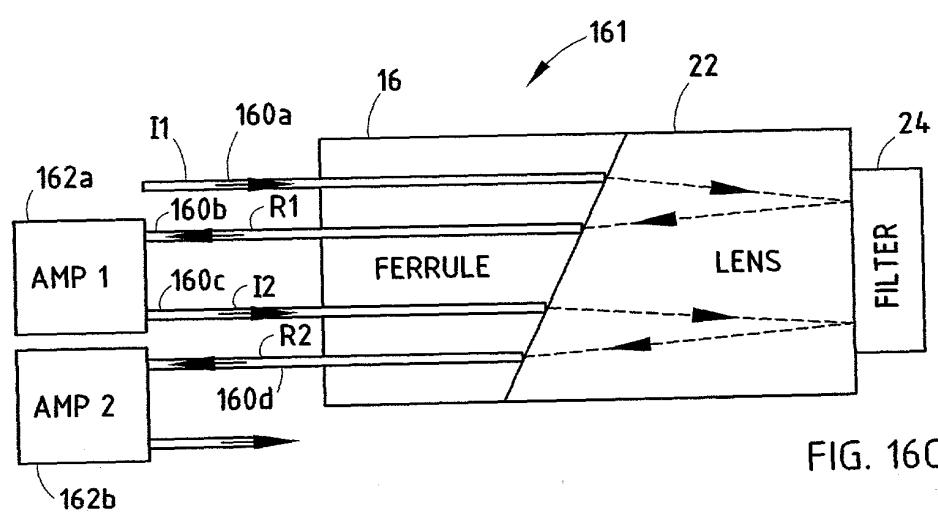
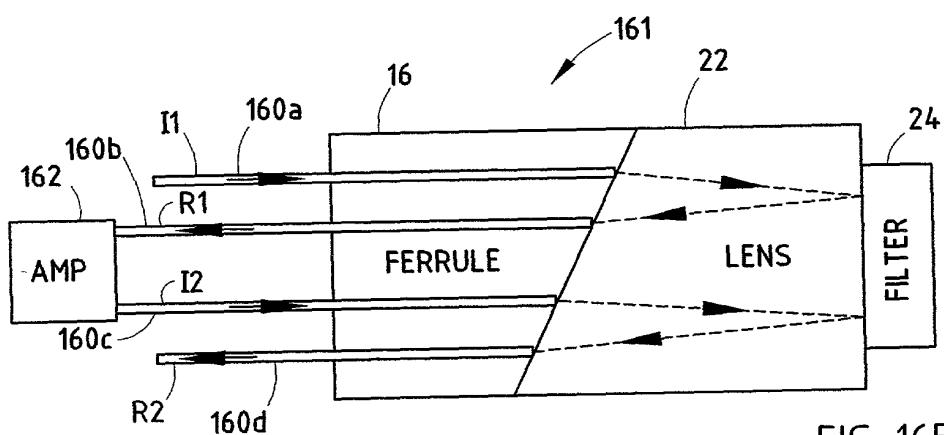
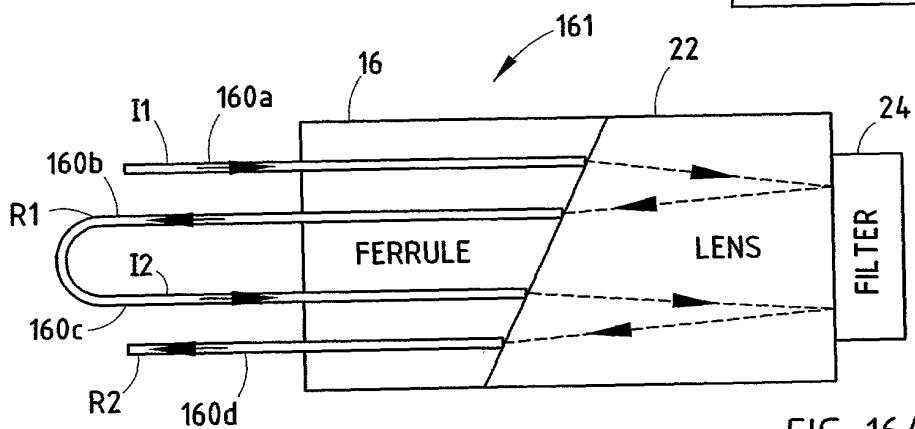




FIG. 14B

FERRULE SD	COLLIMATOR AOI	FILTER AOI RANGE
125	1.84	1.800 1.866
129	1.91	1.866 1.930
134	1.97	1.930 1.992
138	2.03	1.992 2.052
142	2.09	2.052 2.111
146	2.15	2.111 2.167
149	2.21	2.167 2.223
•	•	• •
•	•	• •
•	•	• •

FIG. 15

LEGEND
I - INPUT
R - REFLECTED
T - TRANSMITTED



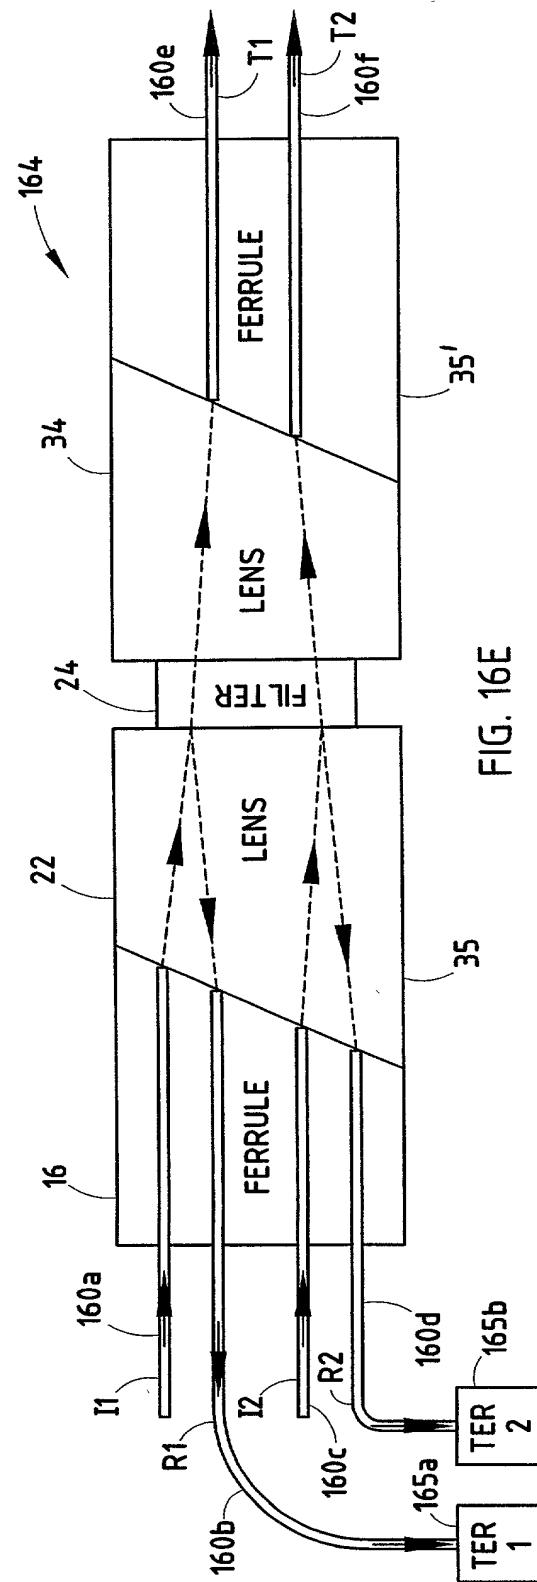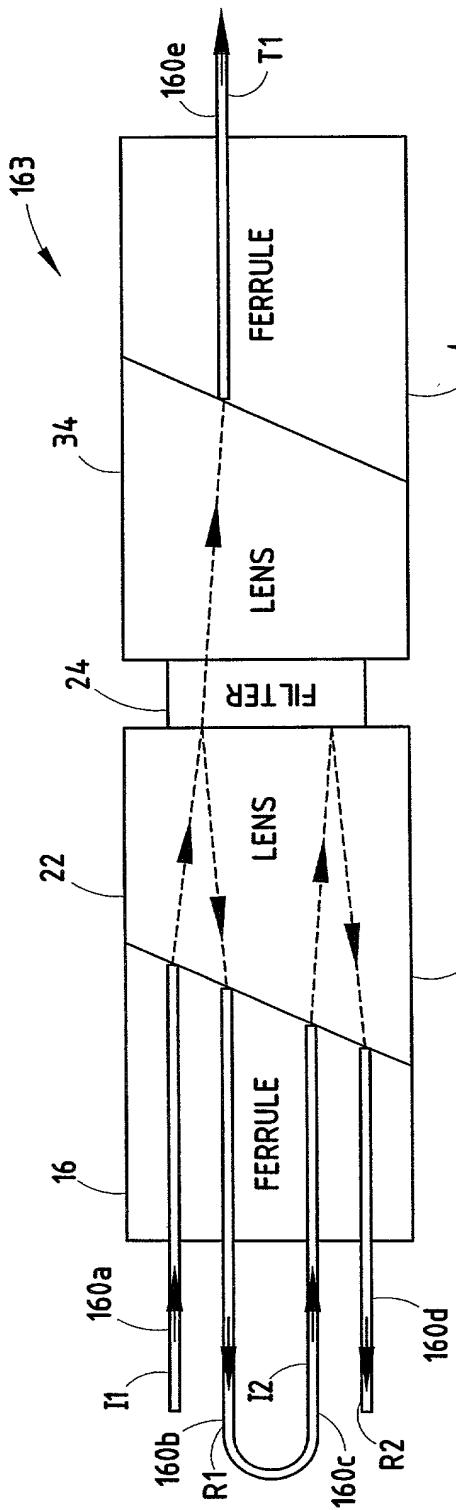

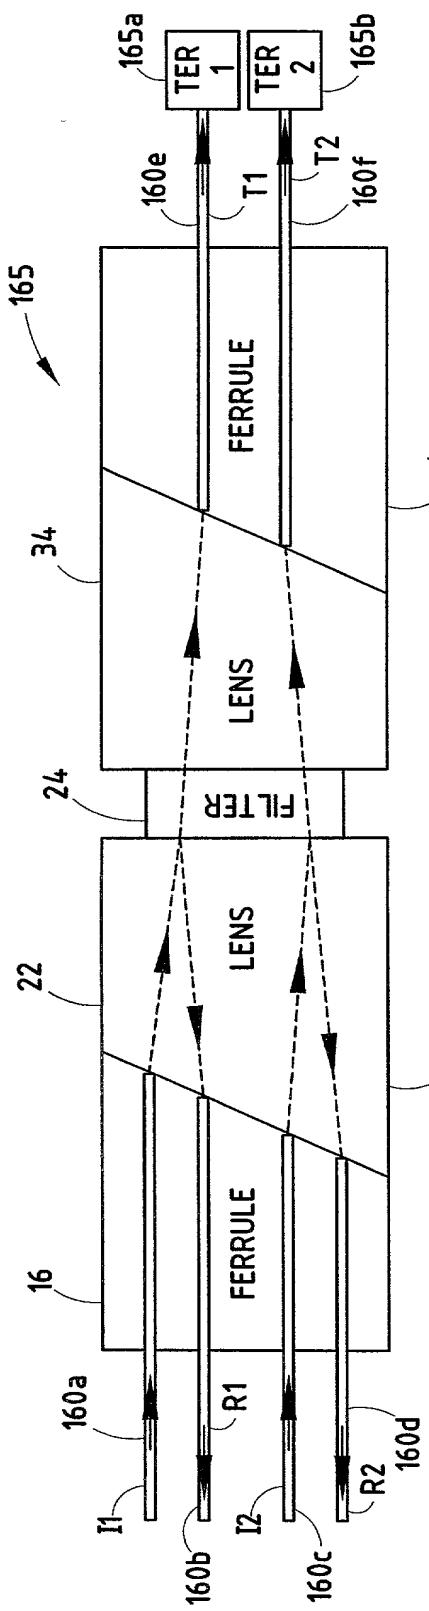


FIG. 16F

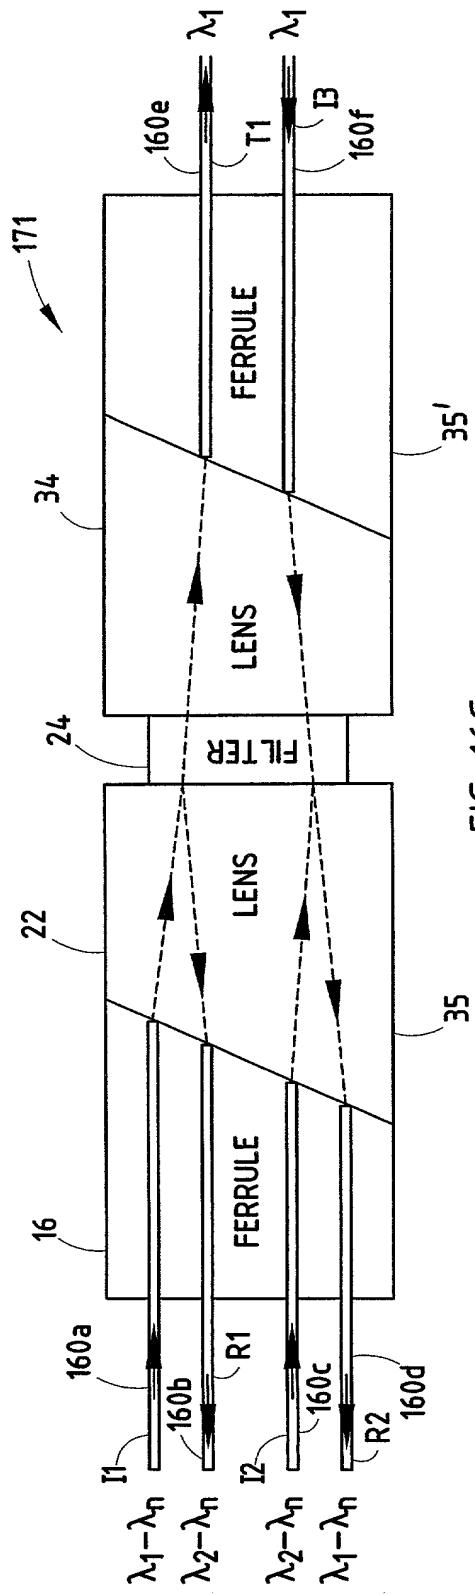
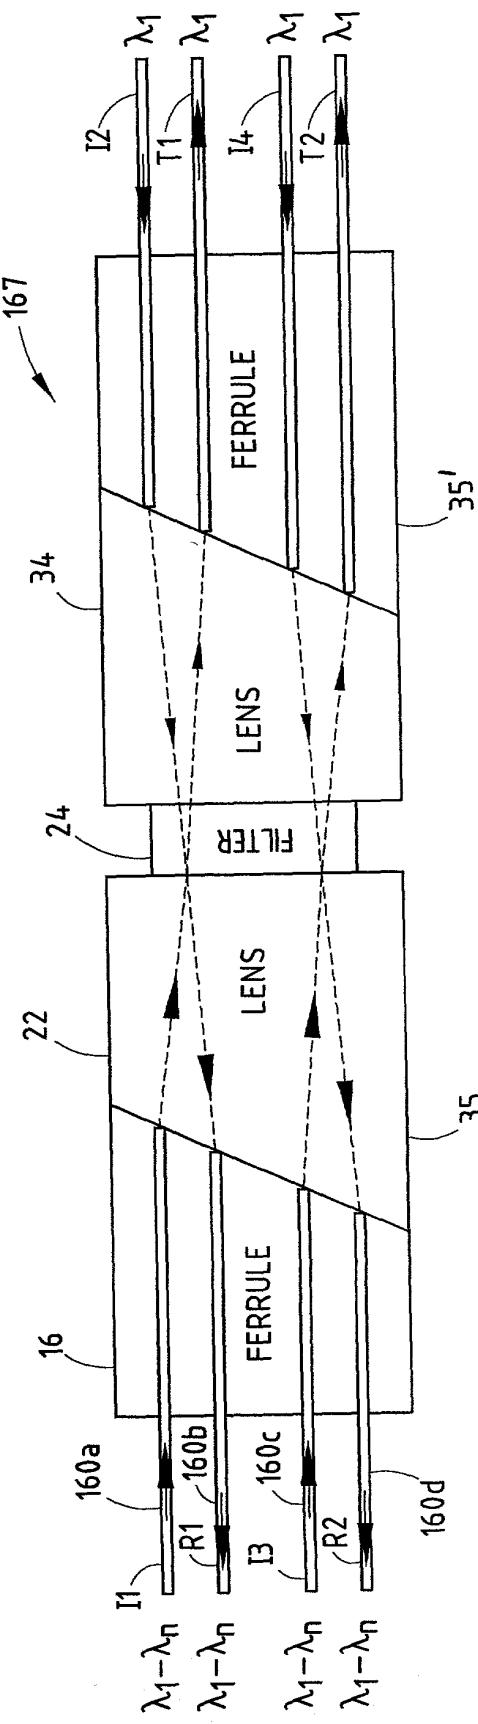
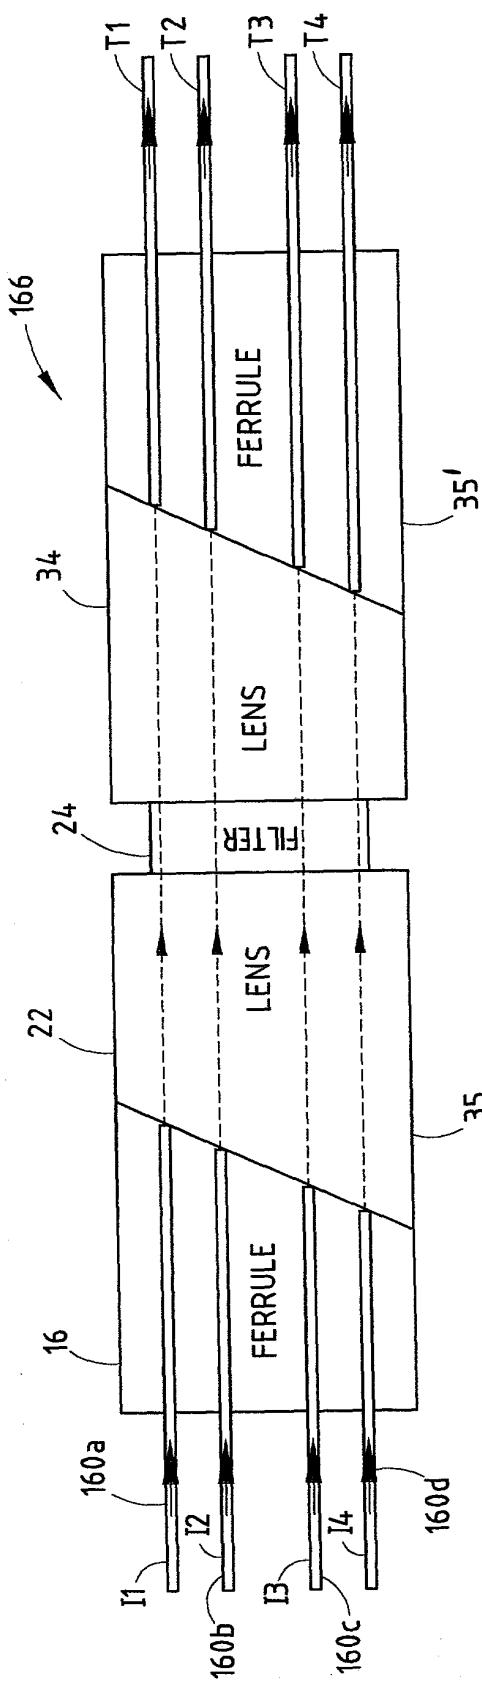


FIG. 16G



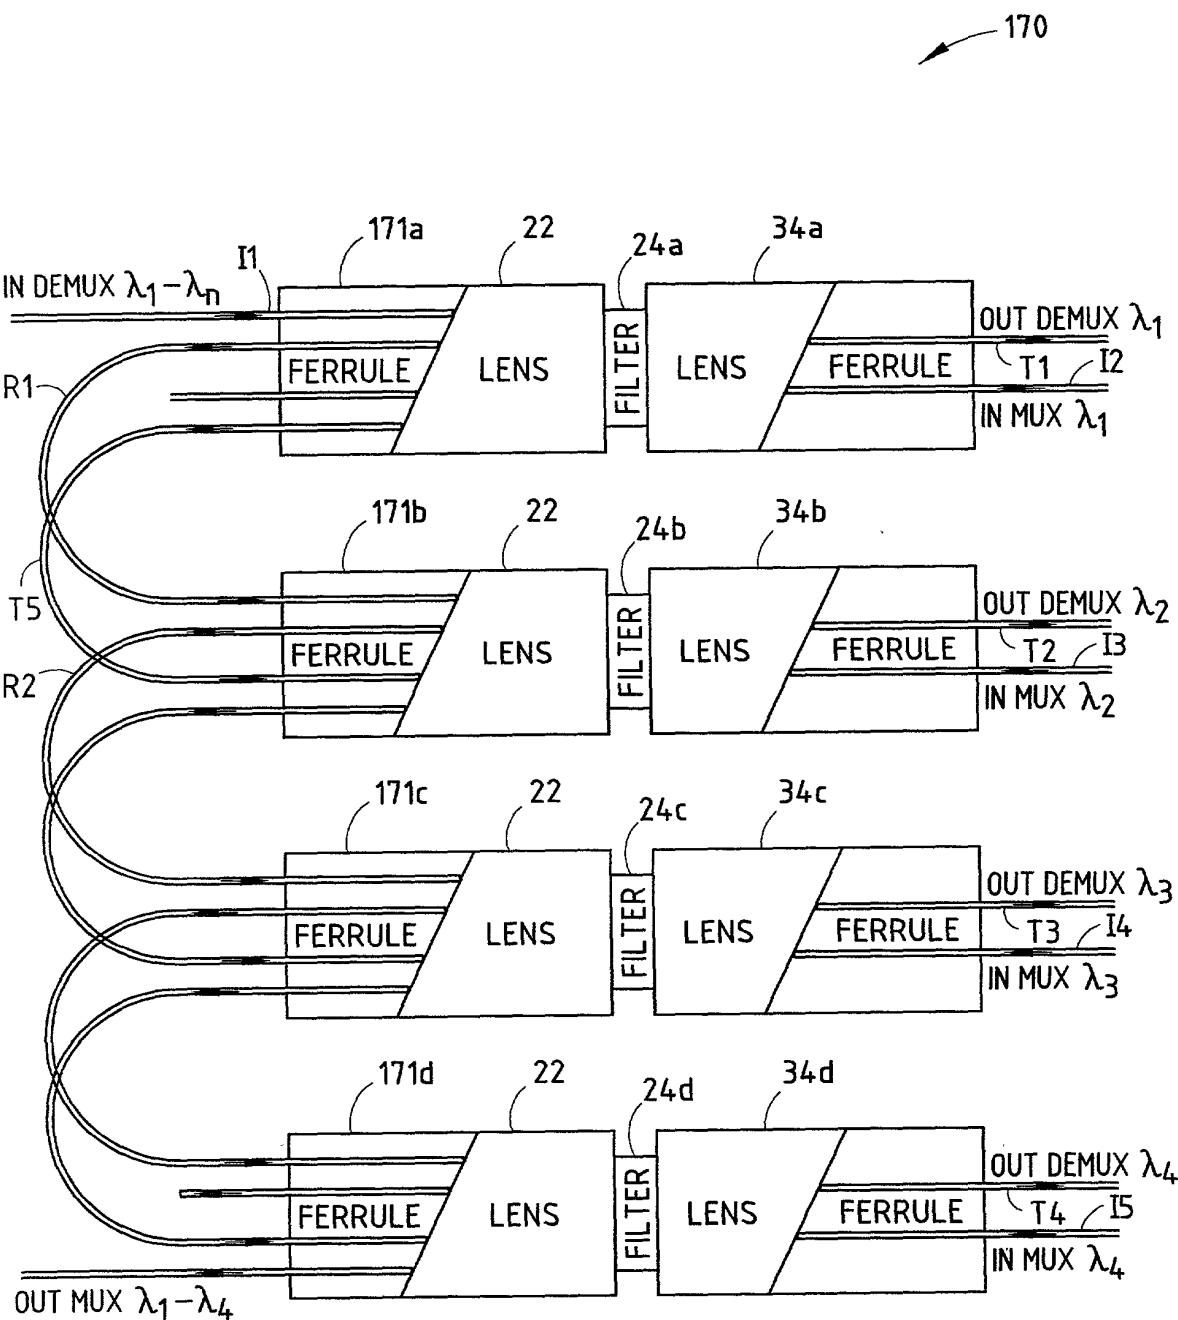


FIG. 17